

# ACE-BoxIPC-11L2-CL



## System

CPU	Intel® Atom N270 1.6GHz
Memory	On board DDRII 1GB(1GB DDRII SO-DIMM Option), (2GB Max)
Chipset	Intel® 945GSE + ICH7M
Graphics	Intel® GMA 950(QXGA 2048 x 1553) Integrated Graphics Engine, 256MB(Max Share)
SATA/IDE Port	1 x 44 Pin IDE 2 x Serial ATA
Ethernet Chip	2 x RTL8111C for 10/100/1000 Base-T 1 x mPCI-E WiFi A/G/N
Sound Chip	VIA HID Audio Codec Option(External DVD Super Multi)

## Rear I/O

Graphics Port	1 x VGA 1 x DVI-D
Ethernet Port	2 x RJ45 for GbE
Audio Port	1 x Audio MIC-in/Line-out (Front Audio MIC-in/Line-out)
USB Port	5 x USB 2.0(Front x 1 + Rear x 4)
PS/2 Port	1 x Keyboard, Mouse
Serial Port	3 x RS-232 1 x RS-232/422/485
Others	1 x DC 12V IN Put/ WiFi 802. 11 A/G/N
Expansion BUS	1 x Mini PCI Socket 1 x PCIe Mini Card

## Internal I/O


Selectable Port	1 x LVDS, DIO
-----------------	---------------

## Power

Input	AC-DC Adapter 60W 110V ~ 240V(50Hz ~ 60Hz)
Consumption	Integrated Wide Range DC-DC Convert 60W

## Storage

Default	2.5" SSD 64G
---------	--------------

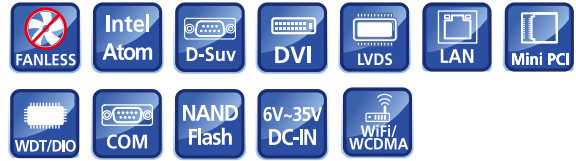


## 특징

General Embedded BoxIPC Ultra Low Power  
Rugged Design fo Shock/ Vibration Protection  
Dual GbE LAN/ Dual Display, Wall Mounting Kit  
Support WiFi 802.11 A/G/N  
With POSCO Crane Bracket Kit(AT-PO-CL-BK-001)  
With 15" Touch Screen Monitor(AT-TSM-15D)  
With Windows 7 DSP  
POSCO Crane Controller System Optimization

## Dimensions

Dimensions (WxHxD) 297 x 83.2 x 163mm

Weight 3.7Kg

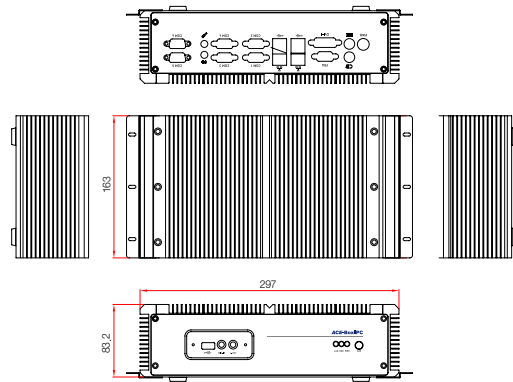

## Crane Bracket Kit

Description	Dimensions(WxHxD)
Monitor-Bracket	347 x 2 x 175
Keyboard-Bracket	260 x 2 x 263
Monitor Holder	25 x 50 x 27

## 15" Touch Screen

Contrast Ration	450 : 1
Resolution	1024 x 768
Input Ports	1 x D-SUB 1 x DVI

